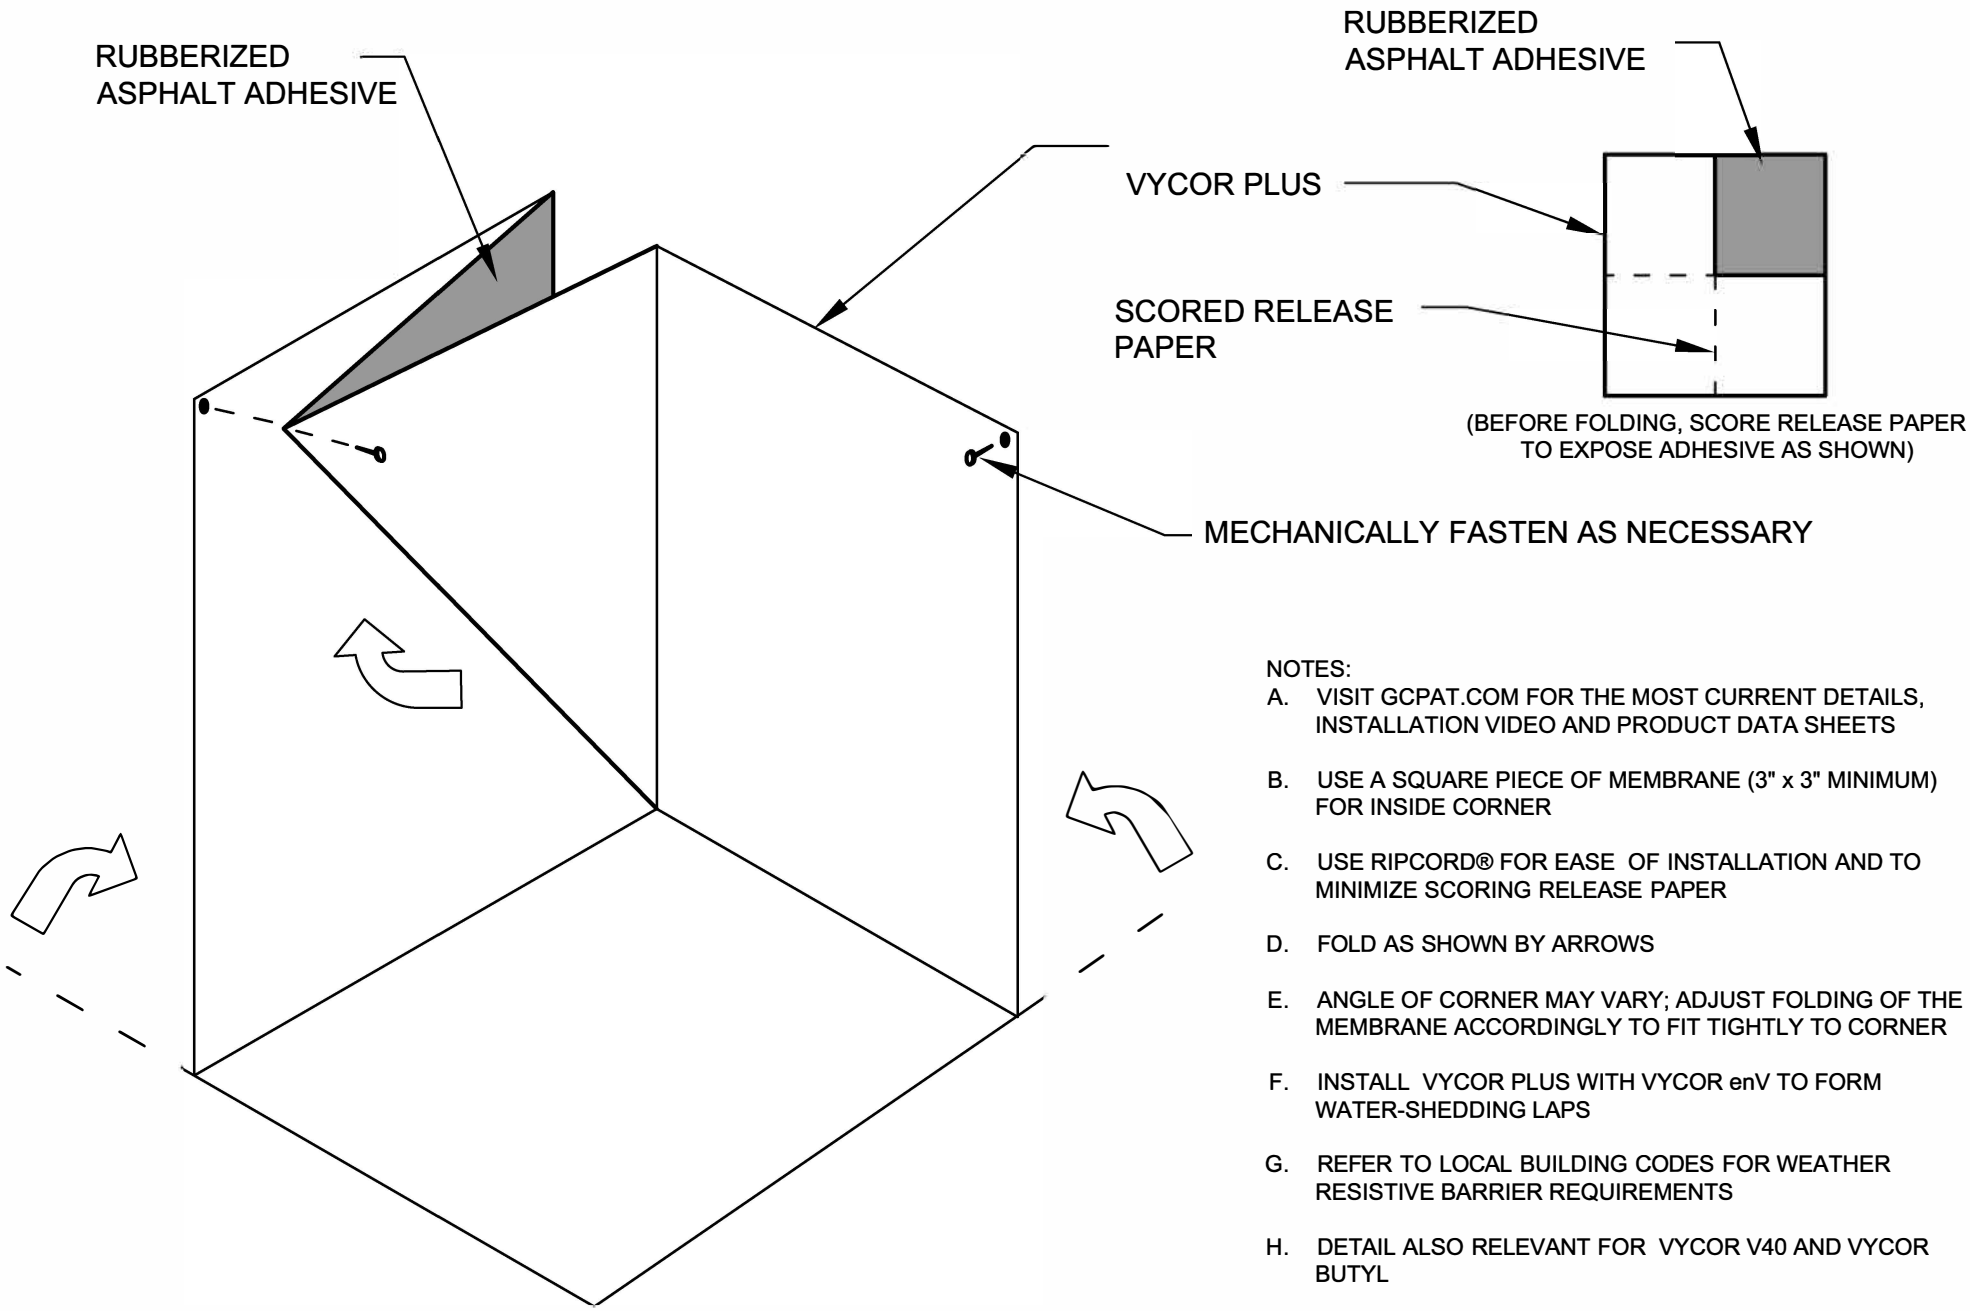

NOTES:

A. VISIT GCPAT.COM FOR THE MOST CURRENT DETAILS, INSTALLATION VIDEO AND PRODUCT DATA SHEETS

B. USE A SQUARE PIECE OF MEMBRANE (3" x 3" MINIMUM) FOR INSIDE CORNER

C. USE RIPCORD® FOR EASE OF INSTALLATION AND TO MINIMIZE SCORING RELEASE PAPER

D. FOLD AS SHOWN BY ARROWS

E. ANGLE OF CORNER MAY VARY; ADJUST FOLDING OF THE MEMBRANE ACCORDINGLY TO FIT TIGHTLY TO CORNER

F. INSTALL VYCOR PLUS WITH VYCOR enV TO FORM WATER-SHEDDING LAPS

G. REFER TO LOCAL BUILDING CODES FOR WEATHER RESISTIVE BARRIER REQUIREMENTS

H. DETAIL ALSO RELEVANT FOR VYCOR V40 AND VYCOR BUTYL

gcp applied technologies

INSIDE CORNER

VYCOR® PLUS SELF-ADHERED FLASHING

Drawing: VCRDET-502	
Scale: Not to scale	
Effective Date: 04/01/09	
Supersedes: 01/31/07	